

FO 100




H: 440
W: 920
L: 920

1 szt.
St.
pc.



netto 11
brutto 15

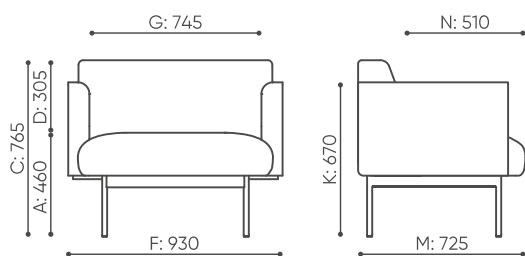

FO 421




H: 870
W: 1000
L: 760

1 szt.
St.
pc.



netto 35,5
brutto 39,5

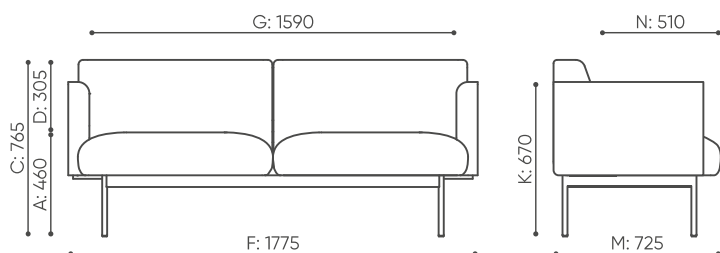

FO 422




H: 870
W: 1850
L: 760

1 szt.
St.
pc.



netto 56
brutto 61

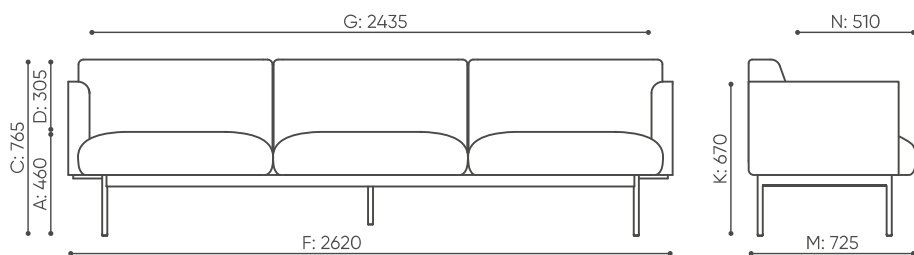

FO 423




H: 870
W: 2700
L: 760

1 szt.
St.
pc.



netto 77
brutto 83

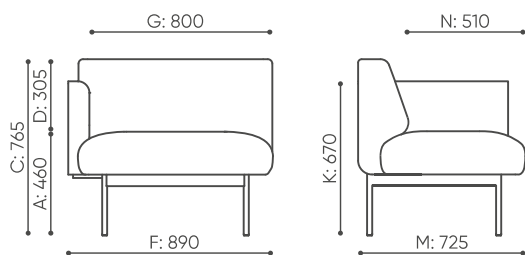

FO 411 L/R




H: 870
W: 1000
L: 760


1 szt.
St.
pc.



netto 30
brutto 34

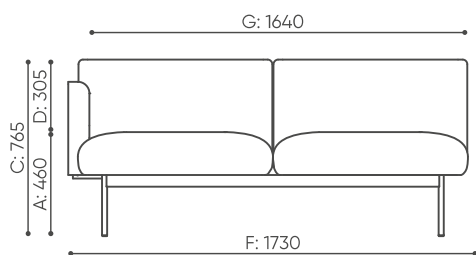

FO 412 L/R




H: 870
W: 1850
L: 760

1 szt.
St.
pc.



netto 49
brutto 54

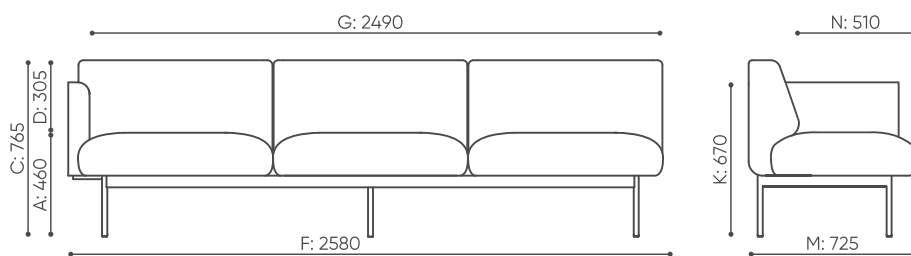

FO 413 L/R




H: 870
W: 2700
L: 760

1 szt.
St.
pc.



netto 71
brutto 76

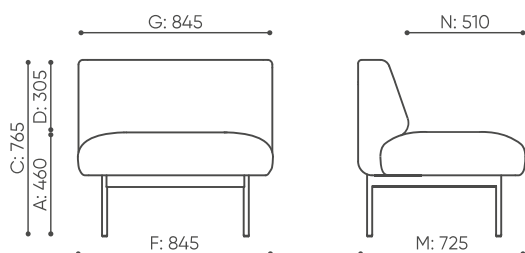

FO 401




H: 760
W: 870
L: 910

1 szt.
St.
pc.



netto 23
brutto 27

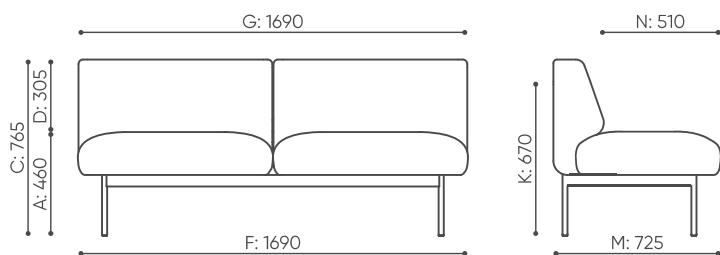

FO 402




H: 870
W: 1850
L: 760

1 szt.
St.
pc.



netto 42
brutto 47

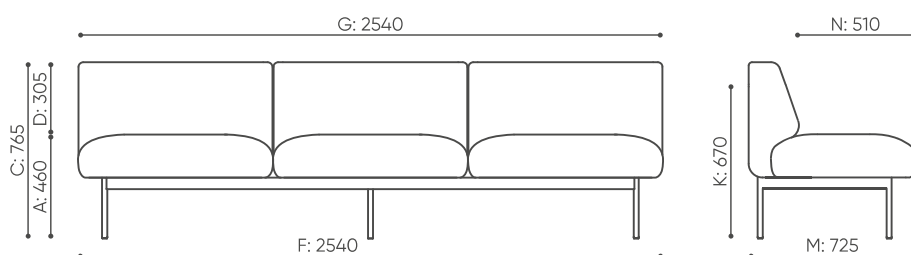

FO 403




H: 870
W: 2700
L: 760

1 szt.
St.
pc.



netto 64
brutto 70

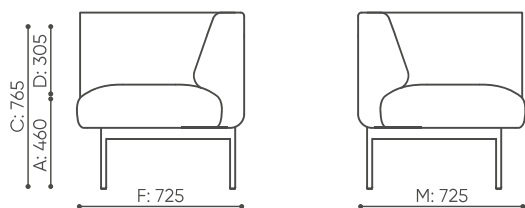


H: 870
W: 1000
L: 760

1 szt.
St.
pc.



netto 23
brutto 26,5

FO 4CC

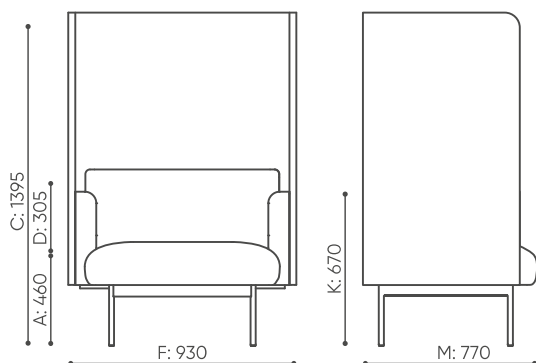


netto 69
brutto 36 39



H: 870
W: 1000
L: 760

120
960
1220

FO 421 W

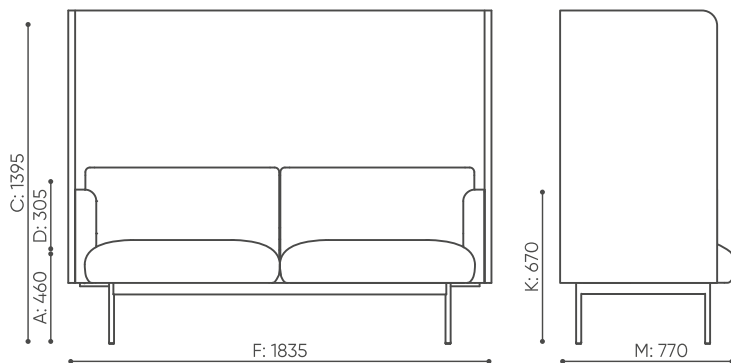


netto 102
brutto 60 53



H: 870
W: 760
L: 1850

80
1200
1800

FO 422 W

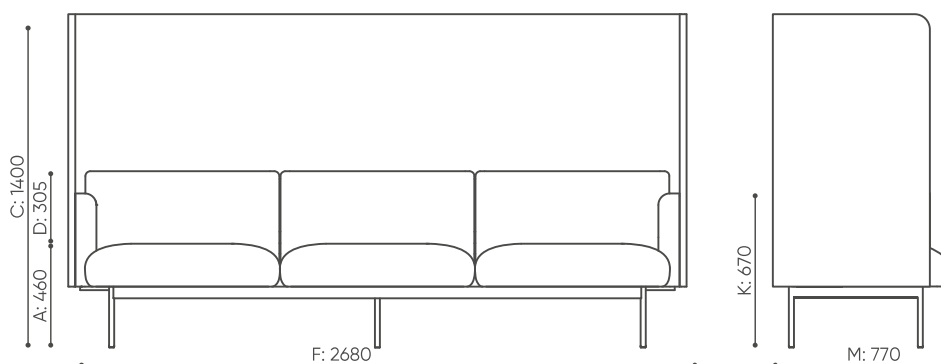


netto 136
brutto 83 66



H: 870
W: 760
L: 2700

80
1200
2650

FO 423 W

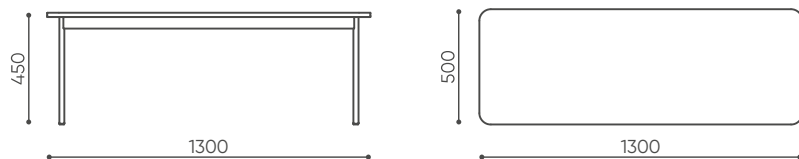

FR TB 130




H: 450
W: 520
L: 1320

1 szt.
St.
pc.



netto 15,5
brutto 18

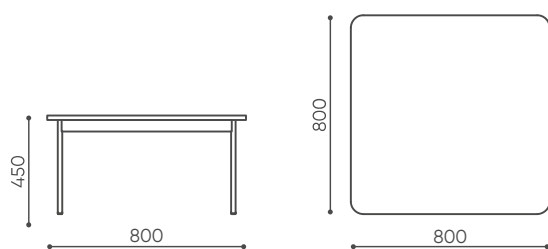

FR TB 80




H: 450
W: 910
L: 910

1 szt.
St.
pc.



netto 14
brutto 16

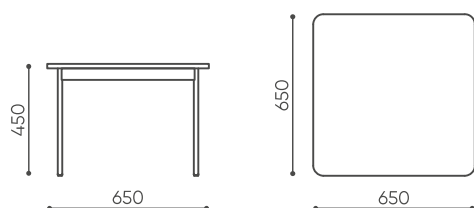

FR TB 65A




H: 540
W: 730
L: 730

1 szt.
St.
pc.



netto 11
brutto 13



2x

H: 870
W: 760
L: 1850

1 szt.
St.
pc.




1x

H: 200
W: 1220
L: 2480

1 szt.
St.
pc.




netto 240
brutto 295

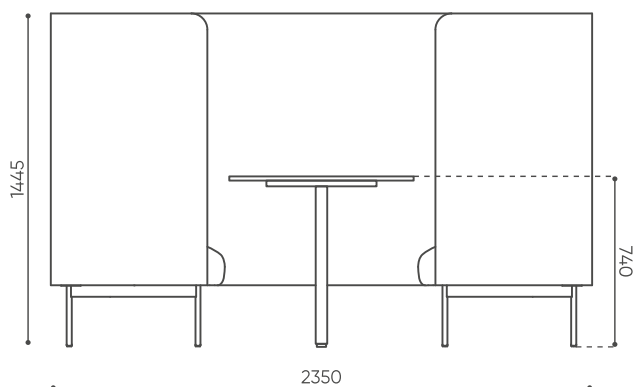

FO BOX2

350

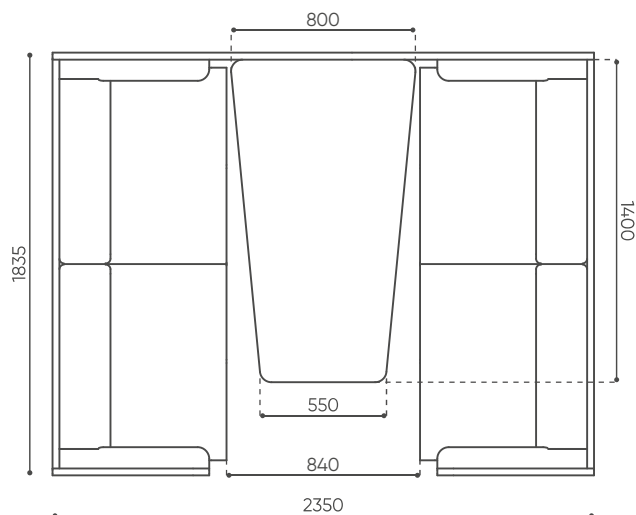

Wymiary i wagi mają charakter orientacyjny i mogą się różnić o 5%. Dane podane są do podstawowych konfiguracji produktów. Zawsze spełnione są wymogi normy.